



F L O O R I N G
EXPERIENCE



LISTA DE PRECIOS



Índice

FITNICE	3
PRECIOS	11
BERGO	12
XL	16
PRECIOS	19
UNIQUE	20
PRECIOS	23
UNIQUE SOFT TILE	24
PRECIOS	27
ELITE	28
PRECIOS	31
NOVA	32
PRECIOS	35
ACCESORIOS SISTEMA 1	36
ACCESORIOS SISTEMA 2	37





 **FITNICE**

TEXTILE FLOOR & WALL COVERING


Piso de tejido vinílico compuesto por hilo de polyester de alta tenacidad recubierto de pvc que proporciona altos niveles de resisitencia

HOME & OFFICES

Colores y texturas muy diversos que permiten un uso POLIVALENTE DE FITNICE®, tanto en ambientes DOMÉSTICOS como en espacios más PROFESIONALES



Opera Prima Louvre, private condominium, Miami (USA)

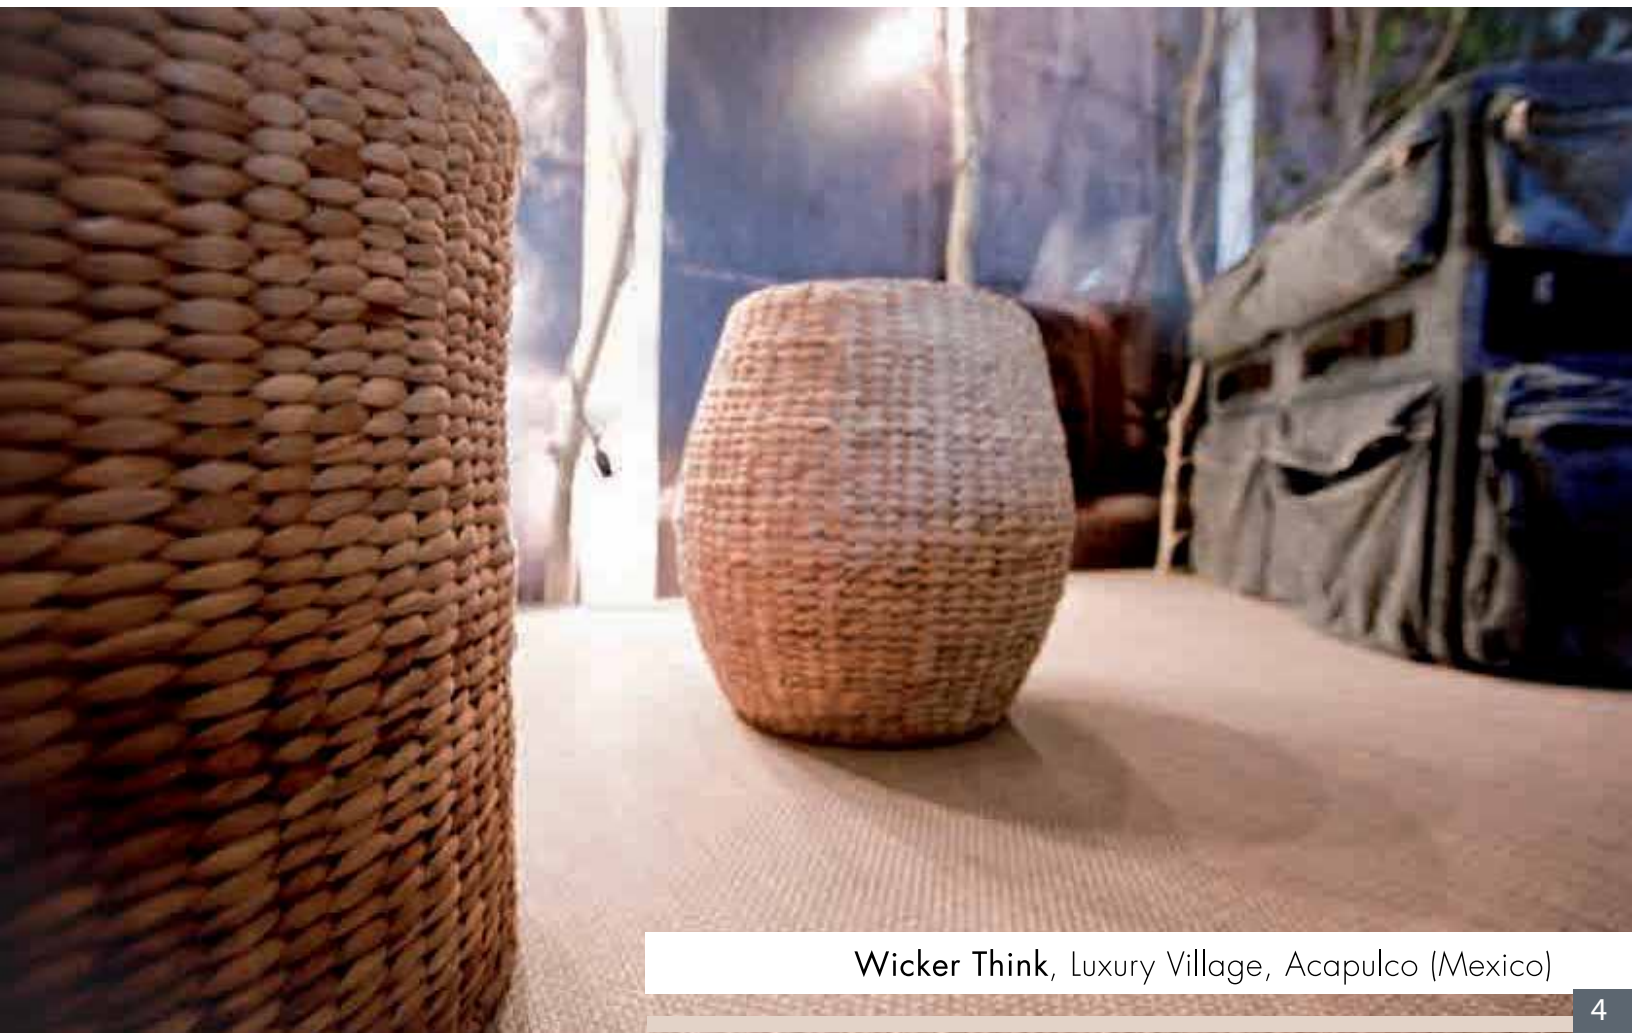

Wicker Think, Luxury Village, Acapulco (Mexico)

BUILDING
FURNITURE
HOTEL
OFFICES
CINEMA
LIBRARY

- *Fácil mantenimiento*
- *resistente al fuego*
- *Soporta la limpieza con productos corrosivos*
- *Aislamiento acústico hasta 15 db*
- *Garantía de 10 años*
- *una vez instalado no necesita productos adicionales*



Time in Town Sunrise, Golf club, Barcelona (Spain)





MODULARIDAD ilimitada

- Rollos
- Losetas
- Losetas autoportantes
- Diseños a medida

Fitnice® se adapta a cualquier medida.



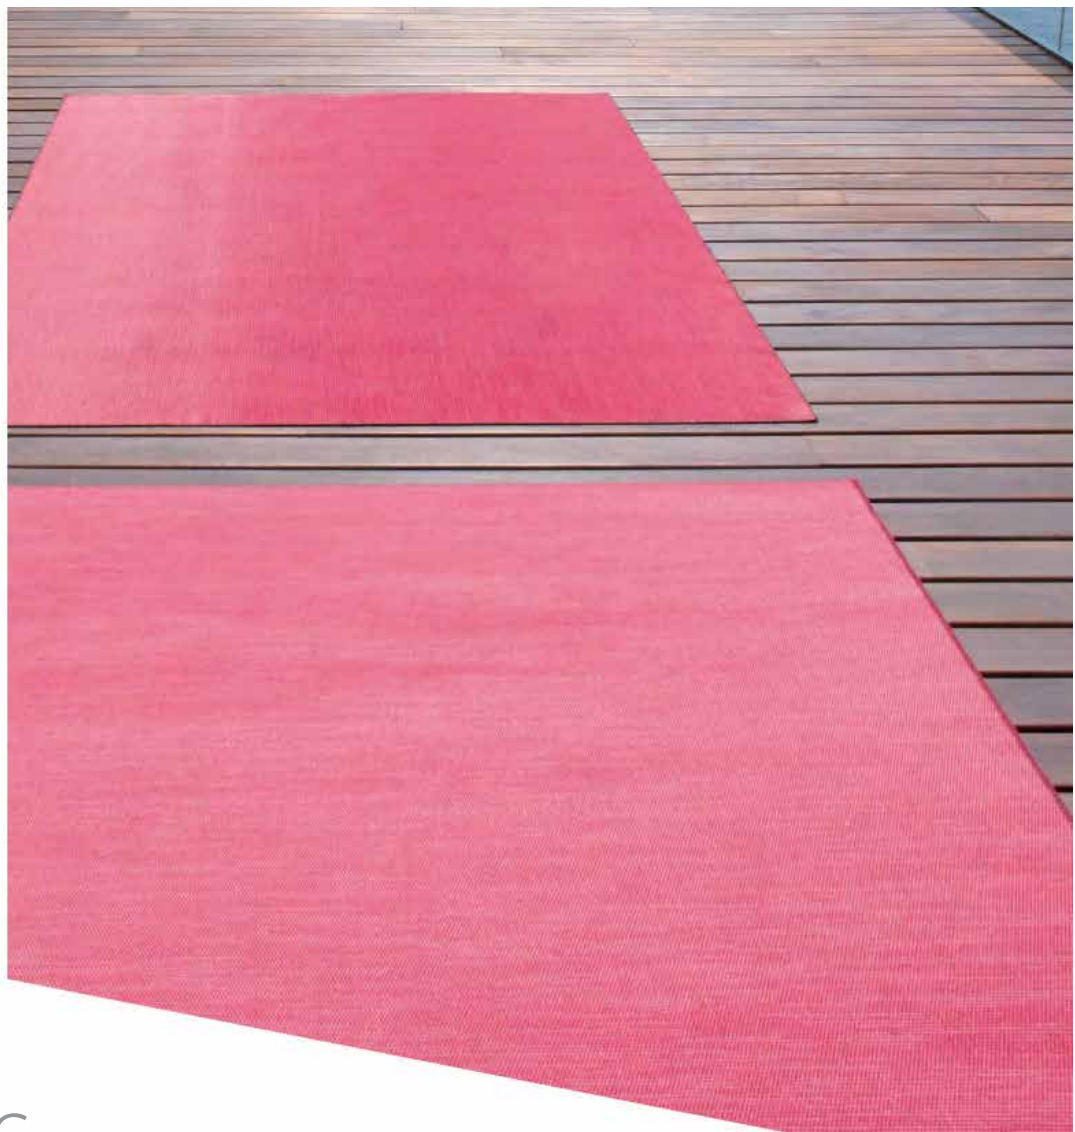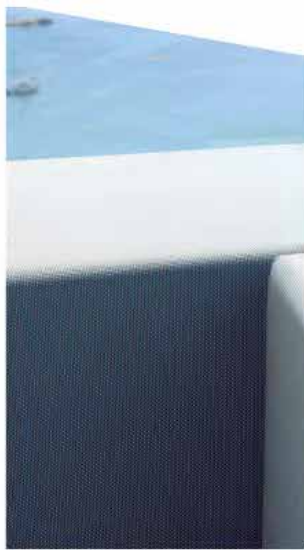

TAPETES

aporta calidez, glamour y distinción a espacios interiores y exteriores

ROLLS & TILES

Technical specifications	Standard	Wicker	Opera Prima	Chroma	Panama
Composition	-	87% PVC + 13% PES + backing 100% PVC	87% PVC + 13% PES + backing 100% PVC	91% PVC + 9% PES + backing 100% PVC	75% PVC + 25% PES + backing 100% PVC
Weight (g/m²)	EN ISO 23997:2012	3100 +13% / -10%	3100 +13% / -10%	3050 +13% / -10%	2800 +13% / -10%
Weight (g/m²) Loose Lay Tiles		4275 +13% / -10%	4275 +13% / -10%	4225 +13% / -10%	3975 +13% / -10%
Thickness (mm)	EN ISO 24346:2012	2.60 + 0.13 / -0.10	2.60 + 0.13 / -0.10	2.70 + 0.13 / -0.10	2.25 + 0.13 / -0.10
Thickness (mm) Loose Lay Tiles		3.30 + 0.13 / -0.10	3.30 + 0.13 / -0.10	3.35 + 0.13 / -0.10	2.90 + 0.13 / -0.10
Light Fastness (Grey scale: 1-5)	EN ISO 4892-2 (exterior)	5/5 White 4/5	5/5 White 4/5	5/5 White 4/5	5/5 White 4/5
Light Fastness (Blue scale: 1-8)	EN ISO 105 B02-2002 (interior)	8/8 White 7/8	8/8 White 7/8	8/8 White 7/8	8/8 White 7/8
Dimensional Stability %	EN 434: 1995	≤0.25	≤0.25	≤0.25	≤0.25
Curling	EN 434: 1995	<0.2 mm	<0.2 mm	<0.2 mm	<0.2 mm
Residual Indentation	EN 433: 1995	<0.1 mm	<0.1 mm	<0.1 mm	<0.1 mm
Castor Chair Test	EN 985: 2002	Pass> 25000 cycles	Pass> 25000 cycles	Pass> 25000 cycles	Pass> 25000 cycles
Abrasion Resistance	EN ISO 12947: 1999	> 100000 cycles	> 100000 cycles	> 100000 cycles	> 100000 cycles
Adhesion	ASTM D 3939:2005	Pass	Pass	Pass	Pass
Sound Insulation	EN ISO 10140:2011	14 dB	14 dB	14 dB	14 dB
Sound Insulation Loose Lay Tiles		15 dB	15 dB	15 dB	15 dB
Thermal Resistance	EN 12667: 2001	< 0.15 m² K/W	< 0.15 m² K/W	< 0.15 m² K/W	< 0.15 m² K/W
Static Electricity	EN 1815: 1998	< 2 kV	< 2 kV	< 2 kV	< 2 kV
Slip Resistance	EN 13893: 2003	>0.4	>0.4	>0.4	>0.4
Fire Classification	EN 13501-1: 2007	BflS1	BflS1	BflS1	BflS1
Tile Dimensions	-	50x50 cm 100x100 cm	50x50 cm 100x100 cm	50x50 cm 100x100 cm	50x50 cm 100x100 cm
Roll Width		200 cm	200 cm	200 cm	
Roll Length		10 ml 20 ml	10 ml 20 ml	10 ml 20 ml	
Use Classification	EN 685: 2007	Commercial Heavy / Domestic Heavy			

Level of Use Class


MATERIAL

Fitnice® is a woven vinyl fabric with a vinyl backing and reinforced structural mesh that affords a high level of dimensional stability and acoustic insulation.

Weaving technology lets us create colour effects and patterns that play with light being an exclusive and unique product.

Fitnice® es un tejido vinílico con un backing de vinilo reforzado con una malla estructural que ofrece un alto nivel de estabilidad dimensional y aislamiento acústico.

La tecnología utilizada en el proceso de tejeduría nos permite crear efectos y diseños que juegan con la luz siendo un producto único y exclusivo.

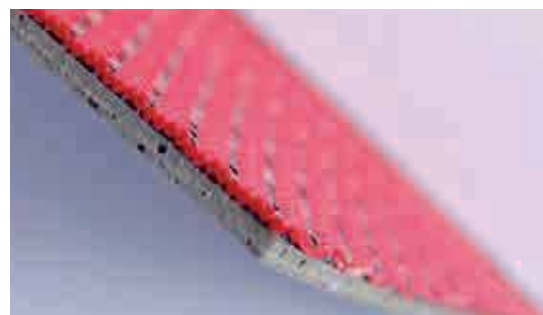

TECHNICAL DATA

WALL

Technical information	Standard	Time in Town	Like Home	Coupage	597
 Composition	-	87% PVC + 13% PES Backing 100% PES FR	85% PVC + 15% PES Backing 100% PES FR	85% PVC + 15% PES Backing 100% PES FR	85% PVC + 15% PES Backing 100% PES FR
 Weight (g/m²)	UNE EN 12127	1010 ± 10%	725 ± 10%	725 ± 10%	725 ± 10%
 Thickness (mm)	UNE EN ISO 5084:1997	1.23 ± 10%	0.95 ± 10%	0.95 ± 10%	0.95 ± 10%
 Abrasion Resistance	UNE EN ISO12947	>100000 cycles	>100000 cycles	>100000 cycles	>100000 cycles
 Light Fastness (Blue scale level)	UNE EN ISO 105 B02-2002	8/8 7/8 white	8/8 7/8 white	8/8 7/8 white	8/8 7/8 white
 Fire Classification	EN 13501-1:2007	Bs2 d0	Bs2 d0	Bs2 d0	Bs2 d0
 Roll size	-	Width 100 cm Length 10 m	Width 120 cm Length 10 m	Width 120 cm Length 10 m	Width 120 cm Length 10 m

ABRASION RESISTANCE



Fitnice® Wall is a textile wall solution with excellent abrasion resistance and great durability. The excellent results obtained with the highest certifications makes Fitnice® Wall one of the most proper solutions for heavy traffic areas, both in domestic and private spaces.



Abrasion Resistance: >100000 cycles

Fitnice® Wall es un tejido con una excelente resistencia a la abrasión y con una gran durabilidad. Los excelentes resultados obtenidos ante las certificaciones más estrictas del mercado lo convierten en una de las soluciones más adecuadas para espacios con tráfico intenso, tanto en ambientes domésticos como en espacios públicos.



Resistencia a la abrasión: >100000 ciclos

CERTIFICATES



ISO 9001, is a set of internationally agreed standards that provide guidelines for a Quality Management System.



ISO 14001 is a standard for environmental management. The aim of the standard is to reduce the environmental footprint of a business and to decrease the pollution and waste that business produces.



The Eco-Management and Audit Scheme, EMAS, allows voluntary participation in an environmental management. It aims to promote continuous evaluation and improvements in the environmental performance of participating organizations.



Vertisol Internacional, SRL
FLOOR: 0338-CPR-2002
WALL: 0338-CPR-2003

CE marked (European Conformity) applies to those products for which the Community has established requirements based mainly on product safety. Community and non-EU manufacturers must conform to its standard product to market its products within the EC.

The floor and wall coverings are subject to CE marking. Because Fitnice® can be installed in places where fire safety is essential, it is necessary for certification by an accredited external body. This body is responsible for overseeing an annual production processes and reaction to fire tests.



0338/14

The Wheel mark (Mark of Conformity) is the European regulatory marking of all marine equipment, as defined in the Marine Equipment Directive, 96/98/EC, to be placed onboard community ships.



The Oeko-Tex® Standard 100 provides the textile and clothing industry with a globally uniform standard for the objective assessment of harmful substances for the first time. Raw materials, intermediate and end products at all stages of processing throughout the manufacturing chain, including accessories, are tested and certified.



Fitnice® offers a 10-years guarantee on all Fitnice® Floor range.



Fitnice® offers a 5-years guarantee on all Fitnice® Wall range.



This is an in-house ecological program that consists in:

- Recycling of production remains produced during the manufacture process.
- Production or re-usable packing material.
- Adding recycled material to floor and wall covering product.



100% of Fitnice® Collections are made within the European Union and therefore comply with the REACH (Registration, Evaluation and Authorisation of Chemicals) Different strategic products such as Vertisol Polyscreen®, Fitnice® and Imagine BO FR have Ok REACH specific certification issued by an independent laboratory.



Fitnice® Floor FloorScore® has the prestigious certification for indoor air quality. Because of its low emission level of volatile substances, Fitnice® Floor meets the criteria of different sustainable programs such as LEED (criterion 4.3, low emissive materials, 1 point), CHPS, the Green Guide for Healthcare Construction among others.



LEED certification provides independent, third-party verification that a building, home or community was designed and built using strategies aimed at achieving high performance in key areas of human and environmental health: Sustainable site development, water savings, energy efficiency, materials selection and indoor environmental quality.



With the label A+, the Varnish belongs to the best category when it comes to the emission of volatile substances. *Information on the emission level of volatile substances in indoor environment, with a risk of toxic inhalation, on a scale ranging from class A+ (very low emissions) to C (high emissions).



The aim is the support and production of extra low-emission construction products.



Phthalates are widely used to impart flexibility to PVC products. Some of them - not all are considered harmful. Going a step ahead, in Polyscreen® and Fitnice® ranges from 2014 has been replaced phthalate plasticizers that are used by different nature.

NOTES

- The straight weft is not an inherent condition / La trama recta no es una condición inherente
- Slight color differences may occur and are no ground for claims / Pueden surgir ligeras diferencias de color y no son motivos de reclamación
- Guarantee of 5 years is any case following manufacturer's installation and maintenance manual / La Garantía de 5 años es siempre siguiendo el manual de instalación y limpieza del fabricante

CLEANING & INSTALLATION



SCAN QR CODE

FLOOR



CLEANING VIDEO



INSTALLATION VIDEO

WALL



INSTALLATION & CLEANING

PISO FITNICE

	ROLLO	LOSETA	LOSETA	LOSETA AUTOPORTANTE	LOSETA AUTOPORTANTE
	ANCHO 2 m x LARGO 20 m	ANCHO 50 cm x LARGO 50 cm	ANCHO 100 cm x LARGO 100 cm	ANCHO 50 cm x LARGO 50 cm	ANCHO 100 cm x LARGO 100 cm
	PRECIO m2 (hasta 80m ²)	PRECIO m2 (hasta 80m ²)	PRECIO m2 (hasta 80m ²)	PRECIO m2 (hasta 80m ²)	PRECIO m2 (hasta 80m ²)
Wicker	\$1,388	\$1,578	\$2,019	\$1,830	\$2,019
Opera Prima	\$1,325	\$1,451	\$1,893	\$1,704	\$1,893
Chroma	\$1,578	\$1,767	\$2,082	\$2,019	\$2,019
Memphis	\$1,388	\$1,451	\$1,893	\$1,704	\$1,893
Panama	N/A	\$1,577	\$2,019	\$1,830	\$1,893

Condiciones:

El precio es en PESOS

El precio incluye IVA

No incluye instalación

No incluye flete ni seguro de transporte

El mínimo a pedir es de 1 rollo y en losetas es de 40m²

El precio de la instalación está sujeto a las condiciones del piso donde se instalará FITNICE

Tiempo de entrega: 10 a 12 semanas a partir de la recepción del anticipo

Para cortes se pedirá un mínimo de 2 mts. Lineales, y se cobrará el precio de la tarifa más \$883 pesos por corte.

En pedidos de más de 80 m2 y hasta 240 m2 se hará un descuento del 5%

En pedidos de 240 m2 en adelante el descuento será del 10%

FITNICE WALL

	Ancho Rollo	Precio m ²
Like Home	120 cm	\$789
Time in Town	100 cm	\$937
Coupage	120 cm	\$723
597	120 cm	\$858
Chroma	120 cm	\$858

Longitud de rollo: 10 mts

Condiciones:

El precio es por metro cuadrado en PESOS

El precio incluye IVA

No incluye instalación

No incluye flete ni seguro de transporte

El precio de la instalación está sujeto a las condiciones del muro donde se instalará WALL FITNICE

Tiempo de entrega: 12 semanas a partir de la recepción del anticipo

Los rollos vienen con una longitud de 10 mts.

El mínimo a pedir es de 1 rollo

En pedidos mayores a 10 rollos se hará un 5% descuento

En pedidos mayores a 15 rollos se hará un 10% de descuento

KIT DE HERRAMIENTAS DE INSTALACIÓN

\$22,723 IVA INCLUIDO

Incluye:

- rodillo
- spikes
- pala autoniveladora
- navaja curva
- aspas
- resanador
- regleta de unión


no aplica descuento de distribuidor

No incluye flete ni seguro de transporte

10
YEARS
WARRANTY




Hecho
orgullosamente
en Suecia

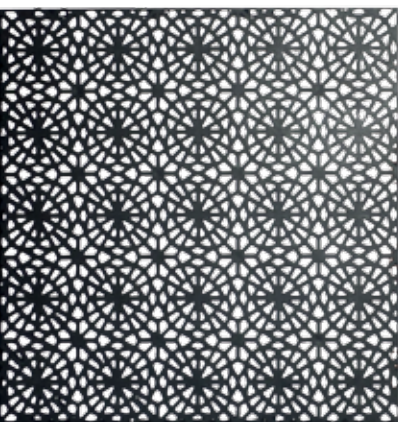

Design
& Covers

bergo®
FLOORING

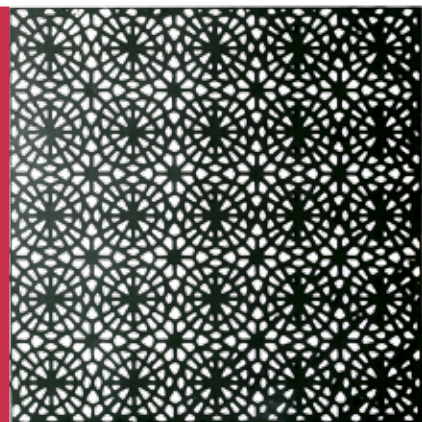

LISTA DE PRECIOS



PISO DE POLIPROPILENO



FÁCIL INSTALACIÓN



& IN
OUT



SENCILLO DE
REMOVER Y
REINSTALAR EN
OTRO LUGAR

SU MANTENIMIENTO
NO REQUIERE
TALLADOS NI ACEITES
DE LIMPIEZA


NO REQUIERE CLAVOS NI PEGAMENTOS




ALTA DURABILIDAD Y RESISTENCIA



EXCELENTE VENTILACIÓN,
DRENAJE Y ES ANTIDERRAPANTE

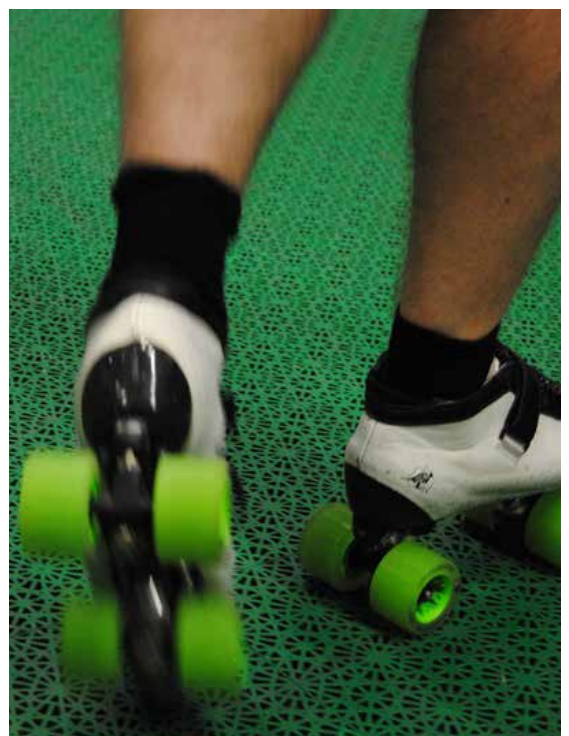

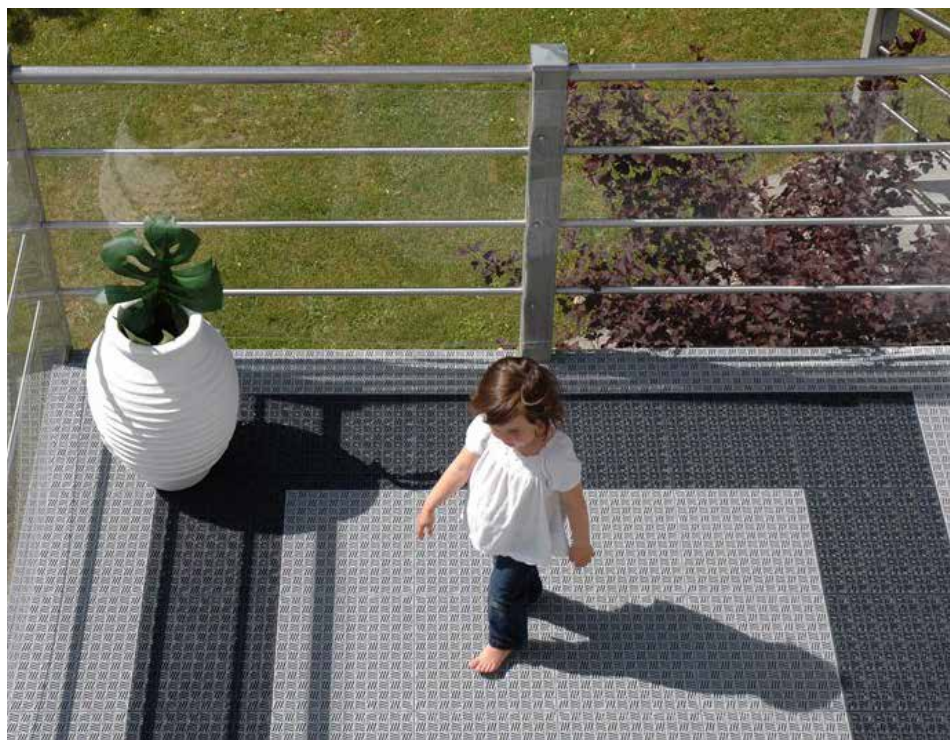

ES ERGONÓMICO Y REDUCE EL FRÍO Y/O CALOR



AMISTOSO CON EL MEDIO AMBIENTE



ABSORBE EL SONIDO



XL

SYSTEM
2

Recyclable "Anywhere" floor.
No nails, no glue.

Usage areas

Bergo Flooring has developed a wide range of flooring products for different environments. BERGO BRIQ is specially developed for usage areas such as: Balconies and patios, garages, storage rooms, basements, bathrooms, saunas, pool areas, showers and laundry rooms and other residential applications.

Advantages

- Easy to install
- Good drainage capability
- Ventilates the floor underneath
- Can be used both indoors and out
- Movable
- Minimal maintenance
- Attractive, durable and practical!

Easy to install


Tapping a rubber mallet or similar over the protruding rings easily interlocks the tiles together. No special tools, glue or screws are required. Use a jigsaw to cut the tiles for a perfect fit.

Minimal maintenance

Bergo tiles require virtually no maintenance. Normal floor care such as occasional wiping with a damp cloth, vacuuming and/or hosing is usually all that is needed. BERGO BRIQ can stay outside in both summer and winter. Your floor will be in good condition year after year.

Accessories

- Edge strip – 376 x 55 mm, for a smart and safe finish.
- Corner strip – 55 x 55 mm.
- Cable strip – 376 x 55 mm, for hiding cables underneath the floor. In most cases one row of Cable strips should be allowed for every 8th row of Bergo floor System 2. To many rows with Cable strips on a surface can prevent the floor from expand, especially in environments where the floor can be exposed to varying temperatures.
- Cable cross-piece – 55 x 55 mm, to be used as two lines of the above Cable strips intersect with each other.
- Disassembly-tool – for easy disassembly and rearrangement.




Edge strips and Corner strip

Decor/Cable strips

Easy to cut

Disassembly-tool

TECHNICAL INFORMATION / TEKNISK INFORMATION



BERGO XL

Material:		ISO2076	Environmentally friendly recyclable UV-stabilized polypropylene.	/ Miljövänlig återvinningsbar UV-stabiliserad polypropen.
Size of tile: /Plattans storlek:		EN427	380 x 380 mm. 1 m ² / box = 7 tiles. 5 m ² / box = 35 tiles.	
Thickness of tile: /Plattans tjocklek:		EN428	10,1 mm.	
Wiegth: /Vikt:		EN430	1 tile: 0,350 kg. 1 m ² : 2,63 kg (Consumer pack). 5 m ² : 12,85 kg (Maxi-pack).	
Point load: /Punktbelastning:		QUALIFIED TEST BY BERGO	250 ton / 1 m ² = 2500 kg/dm ²	
Light fastness: /Ljusbeständighet:		EN 14836 (>3) ISO 105-B02 (1-8)	4-5 7-8	
Weather Fastness /UV- Floorida test (1-5):		ASTM D1435 ASTM G154 Cycle A	4/5	
Slip resistance: /Halkmotstånd:		SSEN-13893	>0,3	
Impact resistance: /Slagtålnghet:		ISO179/1eA ASTM D746	+23 °C = 20 kJ/m ² / -20 °C = 5 kJ/m ² C15 kJ/m ²	
Fire category /Brandklassning:		EN ISO 11925-2	E _n	
CE certification:		EN 14041	0402-CPD-P605080A	



Packaging:	Quantity / packaging unit:
Consumer-pack	1 m ² = 7 tiles
Maxi-pack	5 m ² = 35 tiles

LIMPIEZA:

- se puede barrer y tallar con escoba, aspirar y trapear

RESTRICCIONES:

- no usar cloro o productos altamente abrasivos




BERGO XL

Descripción	Precio Público	Unidad
Bergo XL	\$792	m ²
Moldura reductora	\$47	pieza
Moldura de esquina	\$19	pieza


NOTAS:

- precio público IVA incluido
- tiempo de embarque 2 días (colores en stock)
- tiempo de embarque 8 - 10 semanas (colores sobre pedido)
- no incluye flete ni instalación
- pedido mínimo 1m² para colores en stock
- en colores sobre pedido el mínimo de compra son 100 m²
- en pedidos de más de 100 m² y hasta 250 m² se hará un descuento del 5%
- en pedidos de 250 m² en adelante el descuento será del 7%
- no usar cloro ni limpiadores abrasivos

COLORES EN STOCK

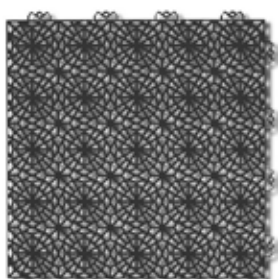

GREY

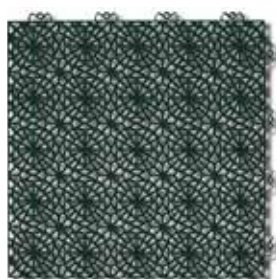


PINE



SAND



TERRACOTA

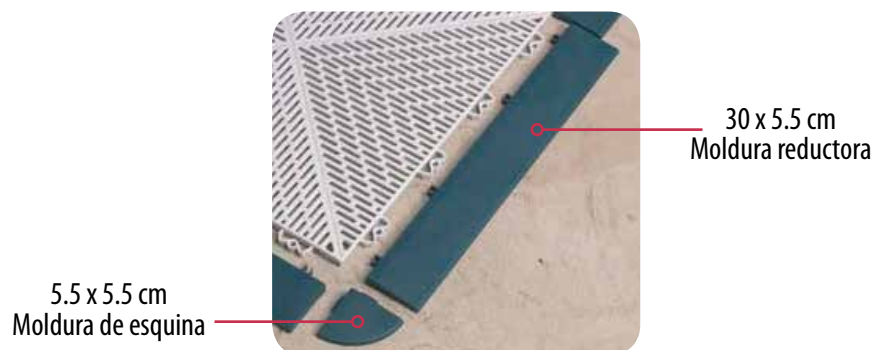



UNIQUE

SYSTEM
2

Recyclable "anywhere floor.
No nails, no glue.

Usage areas

Bergo Flooring has developed a wide range of flooring products for different environments. BERGO UNIQUE is specially developed for usage areas such as: Balconies and patios, garages, storage rooms, basements, bathrooms, saunas, pool areas, showers and laundry rooms and other residential applications.

Advantages

- Easy to install
- Good drainage capability
- Ventilates the floor underneath
- Can be used both indoors and out
- Movable
- Minimal maintenance
- Attractive, durable and practical!

Easy to install

Tapping a rubber mallet or similar over the protruding rings easily interlocks the tiles together. No special tools, glue or screws are required. Use a jigsaw to cut the tiles for a perfect fit.

Minimal maintenance

Bergo tiles require virtually no maintenance. Normal floor care such as occasional wiping with a damp cloth, vacuuming and/or hosing is usually all that is needed. BERGO UNIQUE can stay outside in both summer and winter. Your floor will be in good condition year after year.

Accessories

- Edge strip – 376 x 55 mm, for a smart and safe finish.
- Corner strip – 55 x 55 mm.
- Cable strip – 376 x 55 mm, for hiding cables underneath the floor. In most cases one row of Cable strips should be allowed for every 8th row of Bergo floor System 2. To many rows with Cable strips on a surface can prevent the floor from expand, especially in environments where the floor can be exposed to varying temperatures.
- Cable cross-piece – 55 x 55 mm, to be used as two lines of the above Cable strips intersect with each other.
- Disassembly-tool – for easy disassembly and rearrangement.




Edge strips and
Corner strip

Decor/Cable strips

Easy to cut

Disassembly-tool

TECHNICAL INFORMATION / TEKNISK INFORMATION



BERGO UNIQUE

Material:		ISO2076	Environmentally friendly recyclable UV-stabilized polypropylene.	/ Miljövänlig återvinningsbar UV-stabiliserad polypropen.
Size of tile: /Plattans storlek:		EN427	377,2 x 377,2 mm. 1 m ² / box = 7 tiles. 5 m ² / box = 35 tiles.	
Thickness of tile: /Plattans tjocklek:		EN428	10,3 mm.	
Weight: /Vikt:		EN430	1 tile: 0,412 kg. 1 m ² : 3,064 kg (Consumer pack). 5 m ² : 15,02 kg (Maxi-pack).	
Point load: /Punktblastning:		QUALIFIED TEST BY BERGO	500 ton / 1 m ² = 5000 kg/dm ²	
Light fastness: /Ljusbeständighet:		EN 14836 (>3) ISO 105-B02 (1-8)	4-5 7-8	
Weather Fastness /UV- Florida test (1-5):		ASTM D1435 ASTM G154 Cycle A	4/5	
Slip resistance: /Halkmotstånd:		DIN51 130 SSEN-13893	R9 / V10 >0,3	
Impact resistance: /Slagtålighet:		ISO179/1eA ASTM D746	+23 °C = 20 kJ/m ² / -20 °C = 5 kJ/m ² C15 kJ/m ²	
Fire category /Brandklassning:		EN ISO 11925-2	E _{fl}	
CE certification:		EN 14041	0402-CPD-P605080A	

Packaging:	Quantity / packaging unit:	Quantity / pallet:	Size of pallet:
Consumer-pack	1 m ² = 7 tiles	1 pallet = 90 cartons = 90 m ²	1,20 x 0,80 x 1,23 m = 1,18 m ³ , 280 kg gross weight
Maxi-pack	5 m ² = 35 tiles	1 pallet = 36 cartons = 180 m ²	1,20 x 0,80 x 2,41 m = 2,31 m ³ , 560 kg gross weight

LIMPIEZA:

- se puede barrer y talar con escoba, aspirar y trapear

RESTRICCIONES:


- no usar cloro o productos altamente abrasivos

BERGO UNIQUE

Descripción	Precio Público	Unidad
Bergo Unique	\$987	m ²
Moldura reductora	\$47	pieza
Moldura de esquina	\$19	pieza

NOTAS:

- precio público IVA incluido
- tiempo de embarque 8 - 10 semanas (colores sobre pedido)
- no incluye flete ni instalación
- pedido mínimo 100m²
- no usar cloro ni limpiadores abrasivos
- En pedidos de más de 100 m2 y hasta 250 m² se hará un descuento del 5%
- En pedidos de 250 m² en adelante el descuento será del 7%

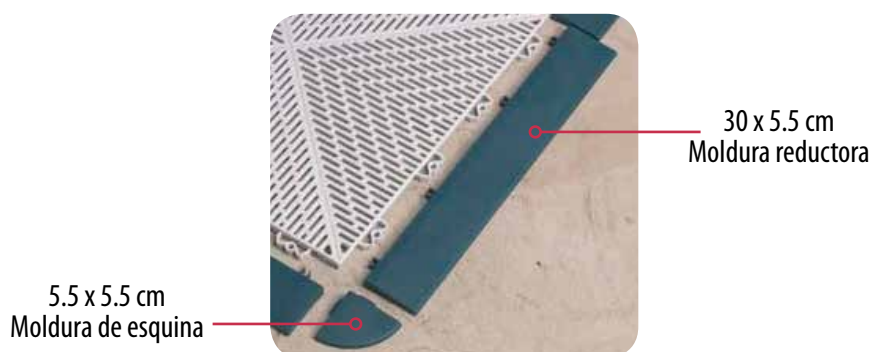

*Soft &
antibacterial*

UNIQUE SOFT TILE

bergo®
FLOORING

WORLD LEADER IN
MULTIFUNCTIONAL
FLOOR TILES

Bergo Flooring launches a new collection of soft flooring for wet areas.

BERGO SOFT TILE is an anti-bacterial, slipreducing and flexible floor tile for wet areas. Bergo Soft Tile offers new opportunities to build a soft floor covering in any desired size at pool, sauna, spa and gym facilities.





SOFT TILE has a safe, slip reducing construction. The floor is soft and warm under bare feet.

Usage areas

For public environments in changing rooms, bathrooms, showers, swimming pool surroundings, saunas, spa- and gym facilities and other wet spaces where mats have to provide added safety and comfort.

Advantages

- Slip reducing and comfortable
- Good drainage capability
- Sound absorbing
- Chemical resistant, FDA approved and antibacterial material
- Non-organic (non-moisture absorbing)

Minimal maintenance

The mats' ingenious design allows the water to flow freely. Cleaning is easy using a scrubber, water hose and/or power hose.

Accessories


- Edge strip – 376 x 55 mm, for a smart and safe finish.



Easy to install



TECHNICAL INFORMATION / TEKNISK INFORMATION



BERGO SOFT TILE

PATTERN: UNIQUE

Material:		ISO2076	Environmentally friendly recyclable UV-stabilized polyethylene. PVC-free.	/ Miljövänlig återvinningsbar UV-stabiliserad polythen. Ingen PVC.
Size of tile: /Plattans storlek:		EN427	377,2 x 377,2 mm. 1 m ² / box = 7 tiles. 5 m ² / box = 35 tiles.	
Thickness of tile: /Plattans tjocklek:		EN428	10,3 mm.	
Wiegtht: /Vikt:		EN430	1 tile: 0,413 kg. 1 m ² : 2,9 kg (Consumer pack). 5 m ² : 14,8 kg (Maxi-pack).	
Point load: /Punktblastning:		QUALIFIED TEST BY BERGO	350 ton / 1 m ² = 3500 kg/dm ²	
Light fastness: /Ljusbeständighet:		EN 14836 (>3) ISO 105-B02 (1-8)	4-5 7-8	
Weather Fastness /UV- Floorida test (1-5):		ASTM D1435 ASTM G154 Cycle A	4/5	
Slip resistance: /Halkmotstånd:		DIN51 130 SSEN-13893	R9 / V10 >0,4	
Impact resistance: /Slagtålighet:		ISO179	+23 °C = NB kJ/m ² / -20 °C = NB kJ/m ²	
Fire category /Brandklassning:		EN ISO 11925-2	E _{fl}	
CE certification:		EN 14041	0402-CPD-P605080A	

Packaging:	Quantity / packaging unit:	Quantity / pallet:	Size of pallet:
Maxi-pack	5 m ² = 35 tiles	1 pallet = 36 cartons = 180 m ²	1,20 x 0,80 x 2,41 m = 2,31 m ³ , 560 kg gross weight

LIMPIEZA:

- se puede barrer y tallar con escoba, aspirar y trapear

RESTRICCIONES:


- no usar cloro o productos altamente abrasivos

BERGO UNIQUE SOFT TILE

Descripción	Precio Público	Unidad
Bergo Unique Soft Tile	\$1,474	m ²
Moldura reductora	\$47	pieza
Moldura de esquina	\$19	pieza

NOTAS:

- precio público IVA incluido
- tiempo de embarque 8 - 10 semanas (colores sobre pedido)
- no incluye flete ni instalación
- pedido mínimo 100m²
- no usar cloro ni limpiadores abrasivos
- En pedidos de más de 100 m2 y hasta 250 m² se hará un descuento del 5%
- En pedidos de 250 m² en adelante el descuento será del 7%

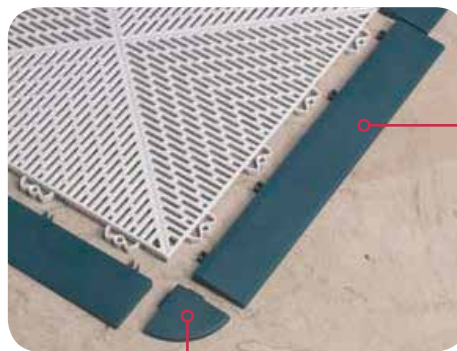

30 x 5.5 cm
Moldura reductora

5.5 x 5.5 cm
Moldura de esquina



ELITE

SYSTEM
2

Recyclable “anywhere floor.
No nails, no glue.

Usage areas

Bergo Flooring has developed a wide range of flooring products for different environments.

Elite is specially developed for usage areas such as: Office environments, conservatories, terraces, storage rooms, recreation/hobby-rooms and other residential applications.

Advantages

- Easy to install
- Ventilates the floor underneath
- Can be used both indoors and out
- Moveable
- Easy to keep clean
- Attractive, durable and practical!
- Possible to achieve various designs

Easy to install and move

Tapping a rubber mallet or similar over the protruding rings easily interlocks the tiles together. No special tools, glue or screws are required. If necessary, use a jig- or a circular-saw to cut the tiles for a perfect fit.


The Bergo tile is easy to move by using a Disassembly-tool (see picture). For an increased comfort a suitable sound absorbing foam underlay may well be used underneath the ELITE tiles.

Easy to keep clean

Bergo tiles require virtually no maintenance. Normal floor care such as occasional wiping with a damp cloth, vacuuming and/or hosing is usually all that is needed. The Elite tile can stay outside in both summer and winter.

Accessories

- Edge strip – 376 x 55 mm, for a smart and safe finish.
 - Corner strip – 55 x 55 mm.
 - Decor/Cable strip – 376 x 55 mm, for special design purposes and/or hiding cables underneath the flooring.
 - Decor/Cable cross-piece – 55 x 55 mm, to be used as two lines of the above Decor/Cable strips intersect with each other.
 - Joint strip – 378 mm, for decoration and closing joints.
- The rubber joint strip are installed in between each ELITE tile in order to create a completely covered surface. The rubber joint strip should only be used indoors or as one have a constant temperature where the flooring are being installed. As one have temperature variations the expansion gap between the tiles needs to be open.



Edge strips and
Corner strip

Decor/Cable strips

Easy to cut

Disassembly-tool

TECHNICAL INFORMATION / TEKNISK INFORMATION



BERGO ELITE

Material:		ISO2076	Environmentally friendly recyclable UV-stabilized polypropylene.	/ Miljövänlig återvinningsbar UV-stabiliserad polypropen.
Size of tile: /Plattans storlek:		EN427	377,2 x 377,2 mm. 1 m ² / box = 7 tiles. 5 m ² / box = 35 tiles.	
Thickness of tile: /Plattans tjocklek:		EN428	10,2 mm.	
Weight: /Vikt:		EN430	1 tile: 0,490 kg. 1 m ² : 3,610 kg (Consumer pack). 5 m ² : 17,75 kg (Maxi-pack).	
Point load: /Punktbelastning:		QUALIFIED TEST BY BERGO	350 ton / 1 m ² = 3500 kg/dm ²	
Light fastness: /Ljusbästndighet:		EN 14836 (>3) ISO 105-B02 (1-8)	4-5 7-8	
Weather Fastness /UV- Floorida test (1-5):		ASTM D1435 ASTM G154 Cycle A	4/5	
Slip resistance: /Halkmotstånd:		SSEN-13893	>0,4	
Impact resistance: /Slagtlighet:		ISO179/1eA ASTM D746	+23 °C = 20 kJ/m ² / -20 °C = 5 kJ/m ² C15 kJ/m ²	
Fire category /Brandklassning:		EN ISO 11925-2	E _{fl}	
CE certification:		EN 14041	0402-CPD-P605080A	

Packaging:	Quantity / packaging unit:	Quantity / pallet:	Size of pallet:
Consumer-pack	1 m ² = 7 tiles	1 pallet = 90 cartons = 90 m ²	1,20 x 0,80 x 1,23 m = 1,18 m ³ , 330 kg gross weight
Maxi-pack	5 m ² = 35 tiles	1 pallet = 36 cartons = 180 m ²	1,20 x 0,80 x 2,41 m = 2,31 m ³ , 650 kg gross weight

LIMPIEZA:

- se puede barrer y tallar con escoba, aspirar y trapear

RESTRICCIONES:


- no usar cloro o productos altamente abrasivos

BERGO ELITE

Descripción	Precio Público	Unidad
Bergo Elite	\$1,271	m ²
Moldura reductora	\$47	pieza
Moldura de esquina	\$19	pieza

NOTAS:

- precio público IVA incluido
- tiempo de embarque 8 - 10 semanas (colores sobre pedido)
- no incluye flete ni instalación
- pedido mínimo 100m²
- no usar cloro ni limpiadores abrasivos
- En pedidos de más de 100 m2 y hasta 250 m² se hará un descuento del 5%
- En pedidos de 250 m² en adelante el descuento será del 7%

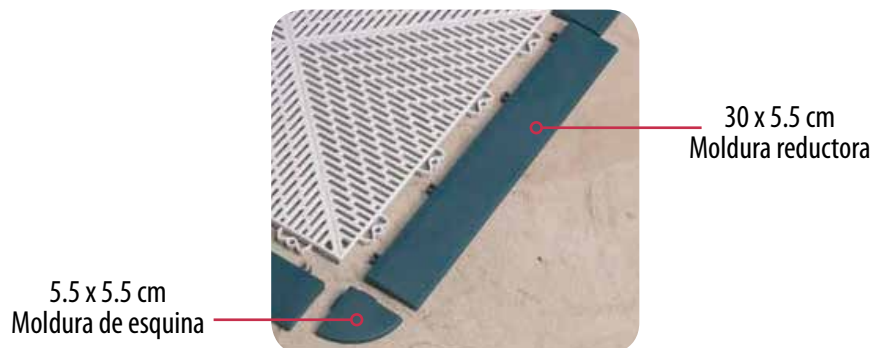



NOVA

SYSTEM
2

Recyclable "anywhere floor.
No nails, no glue.

Usage areas

Bergo Flooring has developed a wide range of flooring products for different environments. BERGO BRIQ is specially developed for usage areas such as: Balconies and patios, garages, storage rooms, basements, bathrooms, saunas, pool areas, showers and laundry rooms and other residential applications.

Advantages

- Easy to install
- Good drainage capability
- Ventilates the floor underneath
- Can be used both indoors and out
- Movable
- Minimal maintenance
- Attractive, durable and practical!

Easy to install

Tapping a rubber mallet or similar over the protruding rings easily interlocks the tiles together. No special tools, glue or screws are required. Use a jigsaw to cut the tiles for a perfect fit.

Minimal maintenance

Bergo tiles require virtually no maintenance. Normal floor care such as occasional wiping with a damp cloth, vacuuming and/or hosing is usually all that is needed. BERGO BRIQ can stay outside in both summer and winter. Your floor will be in good condition year after year.

Accessories

- Edge strip – 376 x 55 mm, for a smart and safe finish.
- Corner strip – 55 x 55 mm.
- Cable strip – 376 x 55 mm, for hiding cables underneath the floor. In most cases one row of Cable strips should be allowed for every 8th row of Bergo floor System 2. To many rows with Cable strips on a surface can prevent the floor from expand, especially in environments where the floor can be exposed to varying temperatures.
- Cable cross-piece – 55 x 55 mm, to be used as two lines of the above Cable strips intersect with each other.
- Disassembly-tool – for easy disassembly and rearrangement.



Edge strips and
Corner strip

Decor/Cable strips

Easy to cut

Disassembly-tool



BERGO NOVA

Material:		ISO2076	Environmentally friendly recyclable UV- / Miljövänlig återvinningsbar stabilized polypropylene. UV-stabiliserad polypropen.
Size of tile: /Plattans storlek:		EN427	377,2 x 377,2 mm. 1 m ² / box = 7 tiles. 5 m ² / box = 35 tiles.
Thickness of tile: /Plattans tjocklek:		EN428	10,5 mm.
Weight: /Vikt:		EN430	1 tile: 0,5 kg. 1 m ² : 3,68 kg (Consumer pack). 5 m ² : 18,1 kg (Maxi-pack).
Point load: /Punktbelastning:		QUALIFIED TEST BY BERGO	400 ton / 1 m ² = 4000 kg/dm ²
Light fastness: /Ljusbeständighet:		EN 14836 (>3) ISO 105-B02 (1-8)	4-5 7-8
Weather Fastness /UV- Floorida test (1-5):		ASTM D1435 ASTM G154 Cycle A	4/5
Slip resistance: /Halkmotstånd:		SSEN-13893	>0,4
Impact resistance: /Slagtålighet:		ISO179/1eA ASTM D746	+23 °C = 20 kJ/m ² / -20 °C = 5 kJ/m ² C15 kJ/m ²
Fire category /Brandklassning:		EN ISO 11925-2	E _{fl}
CE certification:		EN 14041	0402-CPD-P605080A


Packaging:	Quantity / packaging unit:	Quantity / pallet:	Size of pallet:
Consumer-pack	1 m ² = 7 tiles	1 pallet = 90 cartons = 90 m ²	1,20 x 0,80 x 1,23 m = 1,18 m ³ , 330 kg gross weight
Maxi-pack	5 m ² = 35 tiles	1 pallet = 36 cartons = 180 m ²	1,20 x 0,80 x 2,41 m = 2,31 m ³ , 646 kg gross weight

LIMPIEZA:

- se puede barrer y tallar con escoba, aspirar y trapear

RESTRICCIONES:

- no usar cloro o productos altamente abrasivos




BERGO NOVA

Descripción	Precio Público	Unidad
Bergo Nova	\$1,271	m ²
Moldura reductora	\$47	pieza
Moldura de esquina	\$19	pieza

NOTAS:

- precio público IVA incluido
- tiempo de embarque 8 - 10 semanas (colores sobre pedido)
- no incluye flete ni instalación
- pedido mínimo 100m²
- no usar cloro ni limpiadores abrasivos
- En pedidos de más de 100 m2 y hasta 250 m² se hará un descuento del 5%
- En pedidos de 250 m² en adelante el descuento será del 7%

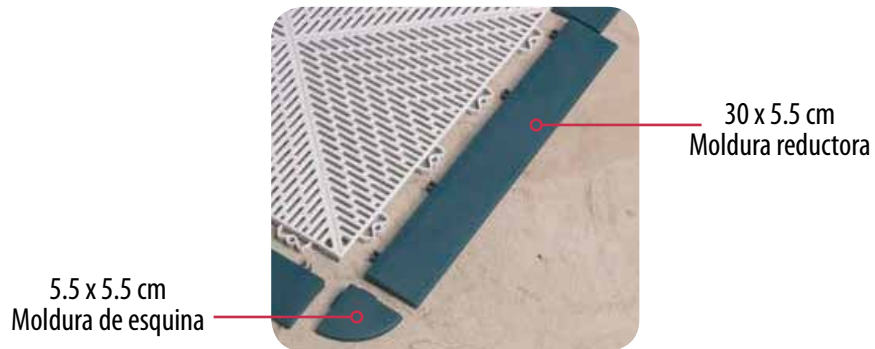

ACCESORIOS SITEMA 1


Descripción	Precio Público	Unidad
Moldura reductora	\$47	pieza
Moldura reductora reforzada	\$53	pieza
Moldura de expansión	\$94	pieza
Franja de expansión multisport	\$63	pieza
Pieza de cruce de expansión	\$32	pieza
Moldura de esquina	\$19	pieza
Juntas de conexión para moldura reductora	\$34	pieza
Cubre orilla	\$347	ml

Moldura reductora
30 x 5.5 cm



Moldura de esquina
5.5 x 5.5 cm

franja de expansión

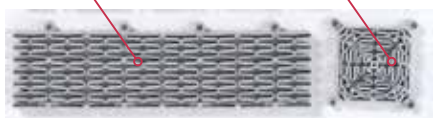

pieza de cruce de expansion

Herramienta desmontaje 1




Cubre orilla



HERRAMIENTAS

HERRAMIENTA	Precio Público	Unidad
Herramienta desmontaje PRO	\$1,747	pieza
Herramienta desmontaje 1	\$573	pieza

moldura de expansion
para sistema multisport

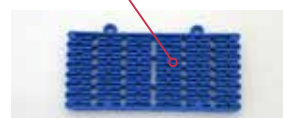

Herramienta desmontaje PRO



juntas de conexión para moldura reductora



ideales para unir el piso y las molduras
cuando el piso termina en macho

ejemplo:

EN STOCK:

- moldura reductora (en colores de XL de Stock)
- herramienta desmontaje PRO
- molduras de esquinas (en colores de XL de Stock)

NOTAS:

- para accesorios o herramientas que no estan en stock el tiempo de entrega es de 8- 10 semanas
- precio público IVA incluido
- no incluye flete ni instalación

ACCESORIOS SITEMA 2

Descripción	Precio Público	Unidad
Moldura reductora	\$47	pieza
Moldura de esquina	\$53	pieza
Canaleta para cable	\$59	pieza
Pieza de cruce para cable	\$32	pieza
Juntas selladoras	\$17	pieza
Cubre orilla	\$347	ml

Moldura reductora
30 x 5.5 cm



Moldura de esquina
5.5 x 5.5 cm

Juntas selladoras



Cubre orilla




HERRAMIENTAS

HERRAMIENTA	Precio Público	Unidad
Herramienta desmontaje PRO	\$1,747	pieza
Herramienta desmontaje SENCILLA	\$573	pieza

canaleta para cable

pieza de cruce para cable

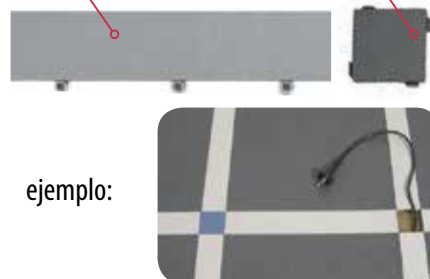

ejemplo:

Herramienta desmontaje PRO



Herramienta desmontaje SENCILLA



EN STOCK:

- moldura reductora (en colores de XL de Stock)
- herramienta desmontaje SENCILLA
- herramienta desmontaje PRO
- molduras de esquinas (en colores de XL de Stock)

NOTAS:

- para accesorios o herramientas que no estan en stock el tiempo de entrega es de 8 - 10 semanas
- precio público IVA incluido
- no incluye flete ni instalación

El precio del flete para pisos Bergo es de :

\$196 hasta 15 m²
(precio IVA incluido y no aplica descuento distribuidor)

Ejemplos:

Si usted pide 15m² pagará \$196

Si usted pide 16m² pagará \$196 + \$196

Si usted pide 31m² pagará \$196 + \$196 + \$196

Si usted pide 7m² pagará \$196

Si usted pide 1m² pagará \$196

Notas:

* Para clientes de la ciudad de Puebla se entrega sin costo en su local según la ruta diaria.

* Para clientes de Edo. Mexico y DF se recomienda pagar flete o recoger en sucursal (Gabín no entrega en domicilio)

* Para el resto de clientes pagar flete.

Saludos.



PRESENTA

NUEVA LINEA DE PISOS EXCLUSIVOS

PISOS MULTIFUNCIONALES

bergo®
FLOORING

CUALQUIER LUGAR



10
YEARS
WARRANTY



EXTERIORES E INTERIORES



FÁCIL INSTALACIÓN



SIN PEGAMENTOS



SIN CLAVOS

ANTIDERRAPANTES

Hecho
orgullosamente
en Suecia



BENEFICIOS:

RESUELVEN LOS PROBLEMAS CON EL FRÍO,
LA HUMEDAD Y EL MANTENIMIENTO DE
SUPERFICIES EXISTENTES, GRACIAS A SU
EXCELENTE VENTILACIÓN Y SU FÁCIL LIMPIEZA

PRODUCTO
EXCLUSIVO
 Design
& Covers